


Accessories




Duct Attenuators

Easily installed, the duct attenuator is used in the system to absorb sound. Available in 100, 125, 150, 200, 250, 315 and 400mm diameter sizes. Manufactured in galvanised sheet metal with 50mm Rockwool sound absorption material. Maximum operating temp. 100°C.

Dimensions

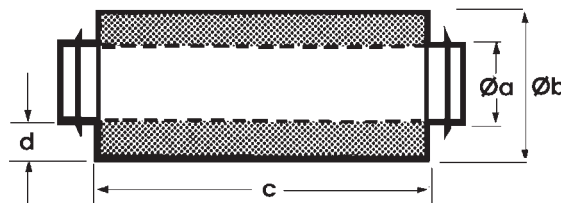

Duct Attenuator Resistance Graph

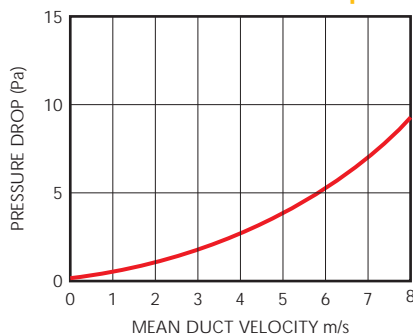

Stock Ref. No.	Øa	Øb	c	d	kg
10534100	100	200	300	50.0	2.4
10534125	125	225	300	50.0	2.6
10534150	150	250	300	50.0	4.1
10535100	100	200	600	50.0	2.9
10535125	125	225	600	50.0	4.5
10535150	150	250	600	50.0	5.8
10535200	200	315	600	57.5	7.0
10535250	250	355	600	52.5	8.6
10535315	315	450	600	67.5	9.8
10535400	400	630	600	115.0	18.0

Stock Ref. No.	Øa	Øb	c	d	kg
10536100	100	200	900	50.0	6.6
10536125	125	225	900	50.0	7.6
10536150	150	250	900	50.0	9.0
10536200	200	315	900	57.5	10.0
10536250	250	355	900	52.5	12.2
10536315	315	450	900	67.5	15.0
10536400	400	630	900	115.0	21.0
10537200	200	315	1200	57.5	14.0
10537250	250	355	1200	52.5	18.0
10537315	315	450	1200	67.5	21.0
10537400	400	630	1200	115.0	27.0

Duct Attenuator Insertion Losses

Stock Ref. No.	Length	Duct Ø	63	125	250	500	1k	2k	4k	8k
10534100	300	100	3	4	10	18	23	25	25	12
10534125	300	125	3	4	8	17	21	23	21	11
10534150	300	150	3	3	6	14	20	23	21	11
10535100	600	100	5	8	16	33	39	40	36	17
10535125	600	125	4	8	13	30	34	35	31	15
10535150	600	150	4	7	13	23	29	36	31	15
10535200	600	200	4	5	11	21	26	32	20	9
10535250	600	250	3	6	10	19	24	29	19	8
10535315	600	315	3	5	8	16	21	22	16	15
10535400	600	400	3	4	7	14	18	19	14	13
10536100	900	100	10	13	20	39	45	38	35	18
10536125	900	125	9	12	18	37	41	37	32	16
10536150	900	150	8	9	15	30	37	37	33	17
10536200	900	200	7	9	14	27	31	36	25	12
10536250	900	250	5	8	13	24	30	31	22	11
10536315	900	315	4	7	11	20	31	27	17	12
10536400	900	400	4	6	9	18	26	24	16	11
10537200	1200	200	10	12	17	35	40	43	27	13
10537250	1200	250	7	9	15	31	36	38	26	12
10537315	1200	315	6	8	13	23	32	30	18	11
10537400	1200	400	5	8	12	20	29	27	17	9