

Unitex Wall Terminals

Features & Benefits

- External weather louvre, wall sleeve and duct connection spigot in one unit
- Satin anodised louvre gives full weather protection
- Epoxy powder coated finish, weather louvre available as optional extra
- 280mm or 80mm wall sleeve section
- Spigot connections from 100mm to 400mm



The Unitex SA Wall Terminal Module consists of a high grade satin anodised weather louvre fitted with bird guard (epoxy finish optional extra). This is located in a galvanised sheet metal 'box section' linked to a reinforced circular stub for direct connection to rigid or flexible ductwork.

Two lengths of 'box section' are available; 80mm and 280mm. An airstream operated back draught shutter can be fitted in the 280mm version. For applications where larger air volumes are involved the Unitex QSA range of wall terminals is available.

Note:

Volume Control Dampers, Speed Clamps & Backdraught Shutters available: see Accessories Section.

Models

Description	Stock Ref
80mm wall sleeve, std. format louvre	
100mm	SA100/80
125mm	SA125/80
150mm	SA150/80
200mm	SA200/80
250mm	SA250/80
315mm	SA315/80


80mm wall sleeve, large format louvre	
125mm	QSA125/80
200mm	QSA200/80
250mm	QSA250/80
315mm	QSA315/80

280mm wall sleeve, std. format louvre	
100mm	SA100/280
125mm	SA125/280
150mm	SA150/280
200mm	SA200/280
250mm	SA250/280
315mm	SA315/280

280mm wall sleeve, large format louvre

100mm	QSA100/280
125mm	QSA125/280
150mm	QSA150/280
200mm	QSA200/280
250mm	QSA250/280
315mm	QSA315/280
400mm	QSA400/280

Dimensions (mm)

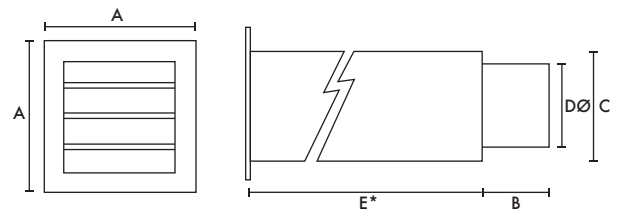

*Dimensions E select from 280 or 80mm

Model Ref	A	B	C	DØ
SA100	180	80	130	99
SA125	210	80	160	124
SA150	230	80	180	149
SA200	280	80	230	199
SA250	330	80	280	249
SA315	400	80	350	313
QSA100	230	80	180	98
QSA125	280	80	230	124
QSA150	330	80	280	149
QSA200	400	80	350	199
QSA250	500	80	450	249
QSA315	550	80	500	313
QSA400	550	80	500	400