

# VA140/150

## Features & Benefits

- VA140/150 Panel models
- 2 Year Guarantee
- Thermo electric shutters to prevent back draughts
- Meets current Building Regulations Approved Document F
- IP44 rated
- Suitable for wall, ceiling, panel and window mounting



### Kitchen ventilation

VA140/150 Panel models are designed to alleviate the everyday problems that condensation and household odours may cause. Effectively extracts odours and moisture laden air from kitchens giving a healthy and fresh environment.

### Building Regulations

Specifically sized to meet the current Building Regulation requirements for powered extract ventilation in domestic kitchens. Control facility fitted as standard. The VA140/150 range is fitted with internal louvres conforming to the latest international safety standards.

Please contact our Customer Service Department for exposed site application.

### Models

#### VA140/150KP (Pullcord)

Single speed kitchen extract fan with On/Off pullcord.

Model Stock Ref  
KP 140120

#### VA140/150KT (Timer)

Single speed kitchen extract fan with adjustable overrun timer (3-30 minutes).

Model Stock Ref  
KT 140220

#### VA140/150KHP (Humidistat)

Single speed humidity-controlled kitchen extract fan with full speed pullcord override. Humidity adjustment 62-82%RH.

Model Stock Ref  
KHP 140320

#### VA140/150KHT (Timer/Humidistat)

Humidity controlled kitchen extract fan with adjustable overrun timer (3-30 minutes). Humidity adjustment 62-82% RH.

Model Stock Ref  
KHT 140420

#### VA140/150VS (Variable Speed)


Variable speed kitchen extract with a built in adjustable speed controller, which can reduce the speed to 40% of its maximum performance.

Model Stock Ref  
VS 458915

### Accessories

Model Stock Ref  
Wall Kit White 140902  
Wall Kit Brown 140903  
Window Kit 140901

### Dimensions (mm)

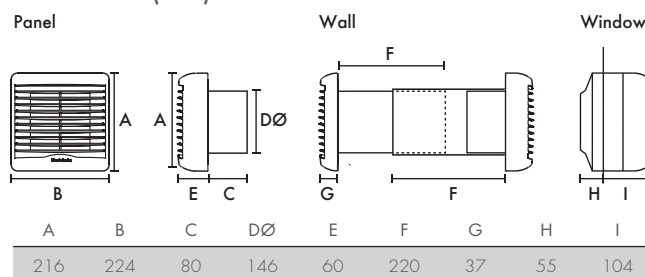

Weight 1.75kg

Fixing hole Ø 152mm (Panel), Ø 160mm (Window), Ø 152mm (Wall)

### Performance Guide

Model	Shutter Actuator	Extract Performance FID		Sound	
		m³/h	l/s	Watts	dB(A) @ 3m
VA140/150KP	Pullcord	245	68	18.8	36
VA140/150KT/KHP/KHT	Instant	245	68	18.8	36
VA140/150VS	Pullcord	100 - 245	28 - 68	18.8	36