

Traditional Standard Panel Fan

- Extract / intake model in 4 sizes: 6", 7", 9" and 12"
- IPX4 Rated
- Built-in shutter available
- Colour: White Fascia
- Pre-wired lead for easy installation
- Manufactured in weather-resistant polymeric materials
- For the best performance from your fan, use a Ecotronic controller



Classic Retro-Styled Ventilation

A versatile range of extract/intake fans designed to satisfy the most demanding requirements of efficient ventilation. Available in four sizes, the Standard Range Panel Fan is supplied without a shutter for vertical installations. The shutter is available as an accessory which can be easily fitted within the unit.

Suitable for mounting at any angle, this range may be installed in internal partitions, ceilings, ducts, and (with external louvres) through external walls.

The outer spigot may be connected directly to flexible ducting and other Vent-Axia ventilation accessories to suit individual applications. When installed, only the white fascia is visible.

Shutter

Type SD/R

The vertical extract/intake shutter fits inside the Vent-Axia unit and closes against unwanted back draughts. It can be fitted at the same time as the unit or at a later date if required.

Airflow operated for extract use, cord operated for intake use.

For all models mounted in vertical surfaces.

Motor

Purpose-designed enclosed ball bearing motor. Suitable for running at any angle. Quiet running.

Supply voltage 220-240V/1/50 Hz.

Suitable for operation in ambient temperatures from -40°C to +50°C.

Fitted with Standard Thermal Overload Protection. (S.T.O.P.).

Controller

The Ecotronic Controller is recommended for use with this model to provide full function control of the fan plus the option of sensor mode using a selection of electromechanical switches to provide automatic switching of the fan. Alternatively, single speed extract is achieved using a normal On/Off switch.

Model


Size	Stock Ref
S6PL	131610
S7PL	132610
S9PL	133610
S12PL	134610

Accessories

Shutters

Size	Stock Ref
S6SD/R	231710
S7SD/R	232710
S9SD/R	233710
S12SD/R	234710

Dimensions (mm)

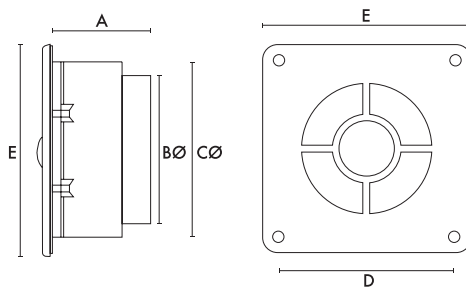

Size	6 in	7 in	9 in	12 in
A	127	137	156	197
BØ	171	210	248	324
CØ	219	250	302	387
D	226	311	311	397
E	254	337	337	419
Fixing Hole Ø	254	337	337	419
Weight kg	2.5	3.0	3.5	5.8

Performance

Model	Extract Performance m ³ /h (l/s) F.I.D.	Watts MAX.	Sound dB(A) @ 3m	Amps @ 240V
S6/PL	354 (98)	32	41	0.16
S7/PL	561 (156)	34	37	0.16
S9/PL	927 (258)	53	45	0.24
S12/PL	1910 (531)	84	48	0.36

Please note that the Standard Range Panel model is not suitable for fitting within an existing Standard Range Wall fitting kit. Please use the correct Standard Range Wall Core assembly.