


Lo-Carbon Silent Fan

- NEW - Now with stylish open grille models
- From only 12dB(A)
- High efficiency long life motor rated up to 40,000 hours run time
- 5 year warranty
- IPX5 - Zone 1 rated
- Meets current Building Regulations Approved Document F and L
- Extra-long duct run? Variable speed adjustment at installation allows you to get the airflow you need
- Closed or open fronted models
- Silent bathroom fan with intermittent and continuous running options
- Back draught shutters included
- Suitable for wall, ceiling, window and panel mounting



Lo-Carbon Silent Fan Axial Bathroom/Toilet Fan

The new Lo-Carbon Silent Fan Range from Vent-Axia not only delivers stylish and silent ventilation without compromise on performance, but now comes with even more features and more model options providing flexibility when choosing the right fan.

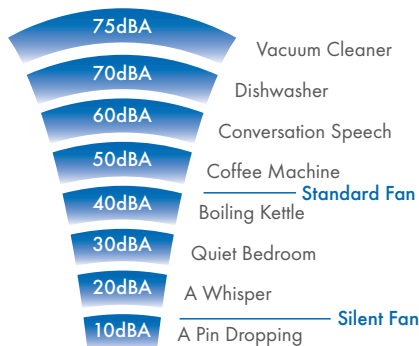

Models

Zone 1 Variable Speed, Intermittent

Remote or light switch operation. Variable speed options selectable at install. Intermittent operation.

| Model | Stock Ref |
|---------------------------|-----------|
| VASF100BV (closed grille) | 479085 |
| VASF100BVO (open grille) | 495700 |

Zone 1 Variable Speed, Intermittent, Timer

Intermittent Operation. Fixed 15 min overrun timer. Variable speed options selectable at install.

| Model | Stock Ref |
|---------------------------|-----------|
| VASF100TV (closed grille) | 479086 |
| VASF100TVO (open grille) | 495701 |

Zone 1 Variable Speed, Intermittent, Humidity Timer

Intermittent Operation. Humidity controlled with fixed 15 min timer overrun. Variable speed options selectable at install.

| Model | Stock Ref |
|----------------------------|-----------|
| VASF100HTV (closed grille) | 479087 |
| VASF100HTVO (open grille) | 495702 |

Zone 1 Variable Speed, Continuous, Timer

Fixed 15 min overrun timer. Continuous running fan with variable speed selectable at install.

| Model | Stock Ref |
|---------------------------|-----------|
| VASF100TC (closed grille) | 479088 |
| VASF100TCO (open grille) | 495703 |

Zone 1 Variable Speed, Continuous, Humidity Timer

Humidity controlled with fixed 15 min timer overrun. Continuous running fan with variable speed selectable at install.

| Model | Stock Ref |
|----------------------------|-----------|
| VASF100HTC (closed grille) | 479089 |
| VASF100HTCO (open grille) | 495704 |


Accessories

| Model | Stock Ref |
|---|-----------|
| Window Kit | 442947 |
| Wall Kit White | 254102 |
| Wall Kit Brown | 254100 |
| Internal Fit Wall Kit White + Backdraught Shutter | 474779 |

Dimensions (mm)

Closed Grille

Open Grille

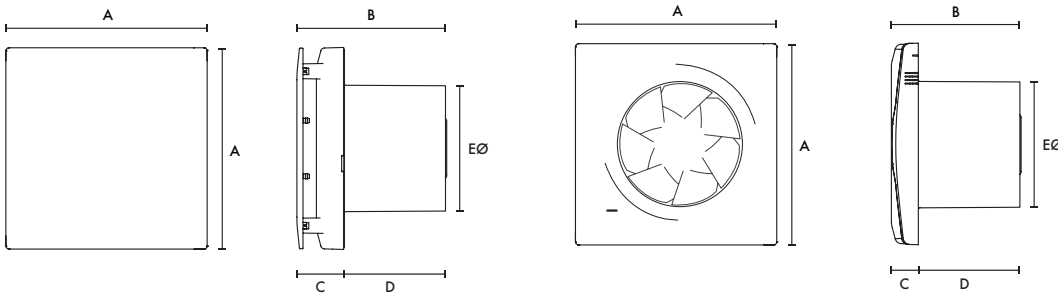


| Grille | A | B | C | D | EØ |
|--------|-----|-----|----|----|----|
| Closed | 160 | 117 | 37 | 80 | 99 |
| Open | 160 | 117 | 22 | 80 | 99 |

Weight 0.7kg


Performance Guide

Closed Grille

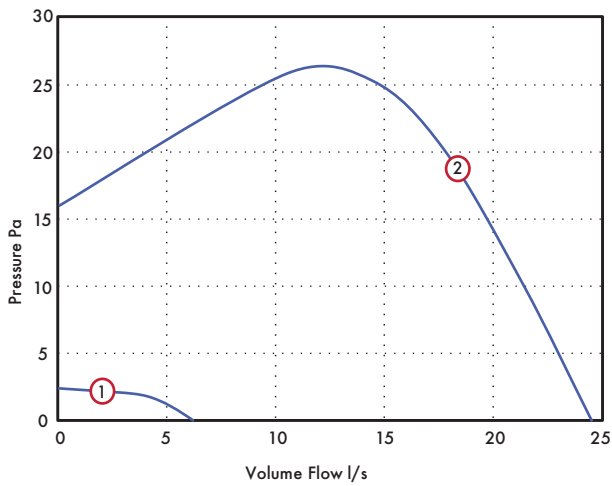

| | Model | Speed | l/s | Watts | Warranty (years) |
|----------------|----------------------|--------------------|---|---------|------------------|
| Variable Speed | VASF100BV/ TV/HTV | 1 Min | 6 | 1.7 | 5 |
| | | 2 Max | 24 | 7.5 | |
| Variable Speed | VASF100TC/ HTC | Adjustable Trickle | 6 - 15 | 1.7 - 5 | 5 |
| | | Boost | Adjustable Trickle + 10 (Up to a max of 22 installed) | 7.5 | |

Open Grille

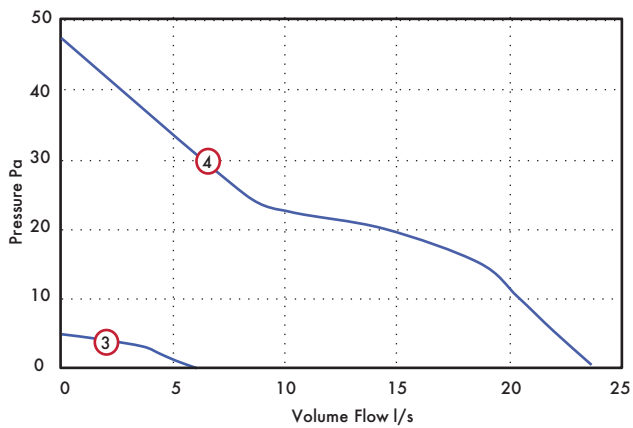

| | Model | Speed | l/s | Watts | Warranty (years) |
|----------------|-------------------------|--------------------|---|---------|------------------|
| Variable Speed | VASF100BVO/ TVO/HTVO | 3 Min | 6 | 1.7 | 5 |
| | | 4 Max | 23 | 7.5 | |
| Variable Speed | VASF100T- CO/HTCO | Adjustable Trickle | 6 - 19 | 1.7 - 5 | 5 |
| | | Boost | Adjustable Trickle + 10 (Up to a max of 22 installed) | 7.5 | |